

DONGFENG

FOOD
PACKAGING
SOLUTIONS

ZHEJIANG DONGFENG PACKING MACHINE CO.,LTD



Product
Founded in
Dec 1989



Zhejiang dongfeng packing machine co.,ltd was founded in 1989 ,It's the members of CCCME , Zhejiang science and technology type enterprises,Wenzhou AAA certificated enterprises, Lucheng focus enterpriseand export base.

We specialized in food packaging and wrapping industries such as vacuum packing machines, shrink tanks, heat sealing machines, cling film wrapping machine and food processing machines/lines etc...

Factory occupying an area of 26800 square meters,more than 160 workers including 40 engineers and technicians.

Annual production capacity is around 200000 sets. Looking forward to build a close business relationship with all the friends in the world.

CERTIFICATE




OUR CERTIFICATION

QUALITY CONTROL SYSTEM is everything

NATIONAL HIGH-TECH
ENTERPRISE

PACKAGING SPECIALIZED
ENTERPRISES

FOCUS EXPORT
ENTERPRISES

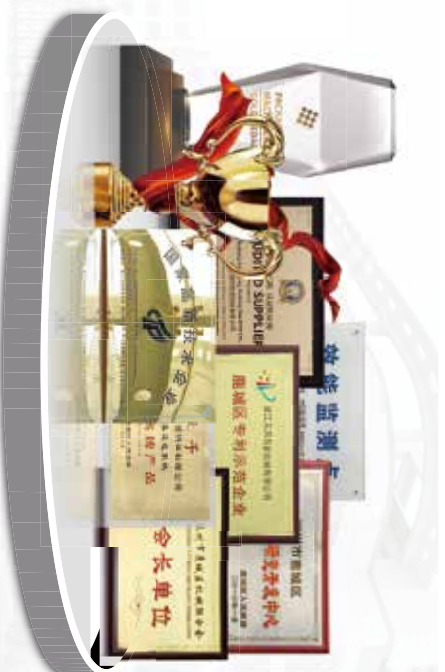

目录

台式真空包装机

TABLE TOP VACUUM PACKING MACHINE

DZ-260H/310H 1

DZ-280 2

DZ-400E 3

DZ-250 4

DZ-300T 5

DZ-300 6

DZ-400 7

立式真空包装机

VERTICAL VACUUM PACKING MACHINE

DZQ-400/500/600/800..... 8

DZQ-800 9

DZ-650KH 10

DZL-600 11

VS-600 12

VS-600L 13

双室真空包装机

DOUBLE CHAMBER VACUUM PACKING MACHINE

DZQ-400 2SA/500 2SA/600 2SA/700 2SA/850 2SA/1000 2SA 14

DZQ-600 2SAT 17

DZQ-850 2SE 19

传输式真空机和热水收缩机 / 热水收缩机

CHAMBER BELT AND DIP/SHRINK TANK

DZQ-850S 20

DZQ-800C 21

ST-6050 22

ST-1552 23

DZQ-800C + ST-8031 25

ST-5030 32

真空贴体机、封盒机

TRAY SKIN VACUUM PACKING MACHINE

MAP MACHINE AND THERMOFORMING MACHINE

ZT-260	26
SY-01	26
ZT-480	27
QT-700S	28
DF-350/420	31

食品加工机

FOOD PROCESSING AND WRAPPING MACHINE

VT-25	32
DF-130J	33
HW-450/550	34
TD-E pro	34
Super 900X	35

封口机

HEAT SEALING MACHINE

PFS-100~500	36
FRN-500~1000	37
PS-450/600	37
FKR-200/300/400	38
PFS-350/450/600	39
PFS-DD200/300/400	39
DBF-770W	40
DBF-770WL	40

热收缩机

SHRINK TUNNEL

FM-3028/4535/5540/5540A	42
BS-200/250/300LD/400LD/450/550/650	43
BS-4525A/4535A	43

编码机

CODING MACHINE

HP-130	44
HP-241	44
MY-380	45
HP-450	45



DONGFENG PACKING

[illegible]




DZ-260/310H is a compact and lightweight automatic vacuum packing machine for kitchen equipment with innovative design and high performance. The Polystyrene vacuum chamber and completely stainless steel frame ensures a perfect vacuum in a super-powerful room. Thanks to a sensory vacuum system and a touch panel with 6 preset digital display ,9 memory programs, it is extremely easy to use. DZ-260/310H perfectly packs products in bags or containers. The transparent tempered glass cover allows better product visibility during packing.

Technical Characters!

- 1.Compact size Light weight
- 2.High-end appearance
- 3.Both household and commercial use
- 4.Vacuum food or pickle food



型号 Model	DZ-260H	DZ-310H
电源 Voltage(V/Hz)	110/220 50-60	
功率 Pump power(kw)	0.25	
密封条 Sealing length(mm)	260×6	310×6
密封室尺寸 Chamber size(mm)	305×300×110	355×300×110
抽气速率 Pump Capacity(m³/h)	4	4
外形尺寸 Dimension(mm)	360×490×210	410×490×210
重量 Weight(kg)	20	24



东风包装 SINCE 1989

DONGFENG PACKING

DZ-280/400E is an ideal vacuum packing machine for small and flexible industry. Typically selected by butcher shops, hotels, restaurants, institutions, grocery stores. It is perfect for vacuum packaging your product to extend shelf life, prevent freezer burns and maintain your product in a controlled atmosphere.




Technical Characters!

- 1.Compact sizelight weight
- 2.High-end appearance
- 3.Both household and commercial use
- 4.Vacuum food or pickle food



DZ-280 Table Top Vacuum Packing Machine 台式真空包装机




型号 Model	DZ-280
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.37
密封条 Sealing length(mm)	280×8
密封室尺寸 Chamber size(mm)	289×387×70
抽气速率 Pump Capacity(m³/h)	8
外形尺寸 Dimension(mm)	494×365×390
重量 Weight(kg)	35.3





DZ-400E Table Top Vacuum Packing Machine 台式真空包装机


型号 Model	DZ-400E
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.9
密封条 Sealing length(mm)	400×10
密封室尺寸 Chamber size(mm)	420×420×100
抽气速率 Pump Capacity(m³/h)	20
外形尺寸 Dimension(mm)	540×499×495
重量 Weight(kg)	73





DZ-250 Table Top Vacuum Packing Machine 台式真空包装机


型号 Model	DZ-250
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.25
密封条 Sealing length(mm)	250×8
密封室尺寸 Chamber size(mm)	275×280×60
抽气速率 Pump Capacity(m³/h)	7.2
外形尺寸 Dimension(mm)	370×355×314
重量 Weight(kg)	32.2

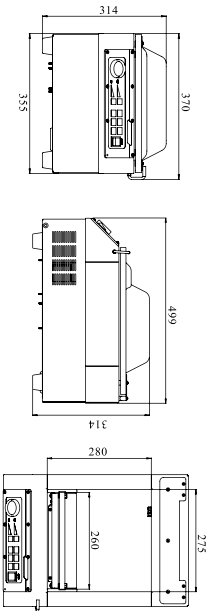



DZ-300T Table Top Vacuum Packing Machine 台式真空包装机

型号 Model	DZ-300T
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.37
密封条 Sealing length(mm)	260×8
密封室尺寸 Chamber size(mm)	340×390×130
抽气速率 Pump Capacity(m³/h)	8
外形尺寸 Dimension(mm)	515×404×389
重量 Weight(kg)	35.3

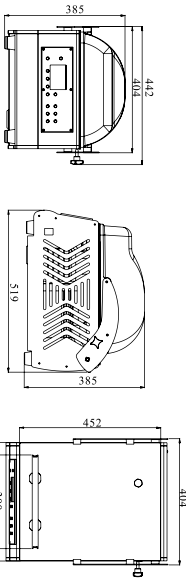

东风包装

SINCE 1989

DONGFENG PACKING

This machine is mainly applied to seal composite film packaging materials.

The solid, liquid, powder, paste and other properties of objects can be vacuum packed even insert gas by this machine. After vacuum packaging, products can be prevented oxidation and mildew, food can be kept fresh and it can effectively reduce the products dimension to make it easier to transport and storage.

it can be widely used in food, medicine, electronics, chemicals and other field, is a good choice for factories, shops, service industry and so on.




Technical Characters!

1. Smart PCB provides several working modes.
2. Main structure use 304 stainless steel.
3. Reliable vacuum pump, Busch pump is optional.
4. Gas insert and oil filter are optional.



DZ-300 Table Top Vacuum Packing Machine 台式真空包装机




型号 Model	DZ-300
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.37
密封条 Sealing length(mm)	260×8
密封室尺寸 Chamber size(mm)	295×390×50
抽气速率 Pump Capacity(m³/h)	8
外形尺寸 Dimension(mm)	500×352×417
重量 Weight(kg)	35.3





DZ-400 Table Top Vacuum Packing Machine 台式真空包装机

型号 Model	DZ-400
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.9
密封条 Sealing length(mm)	400×10
密封室尺寸 Chamber size(mm)	436×420×75
抽气速率 Pump Capacity(m ³ /h)	20
外形尺寸 Dimension(mm)	540×490×560
重量 Weight(kg)	73



东风包装 SINCE 1989

DONGFENG PACKING


This machine is mainly applied to seal composite film packaging materials.

After vacuum packaging, products can be prevented oxidation and mildew, food can be kept fresh and it can effectively reduce the products dimension to make it easier to transport and storage.

it can be widely used in food, medicine, electronics, chemicals and other field, is a good choice for factories, shops, service industry and so on.


Technical Characters!

- 1. Smart PCB provides several working modes.
- 2. Main structure use 304 stainless steel.
- 3. Reliable vacuum pump, Busch pump is optional.
- 4. Gas insert and oil filter are optional.

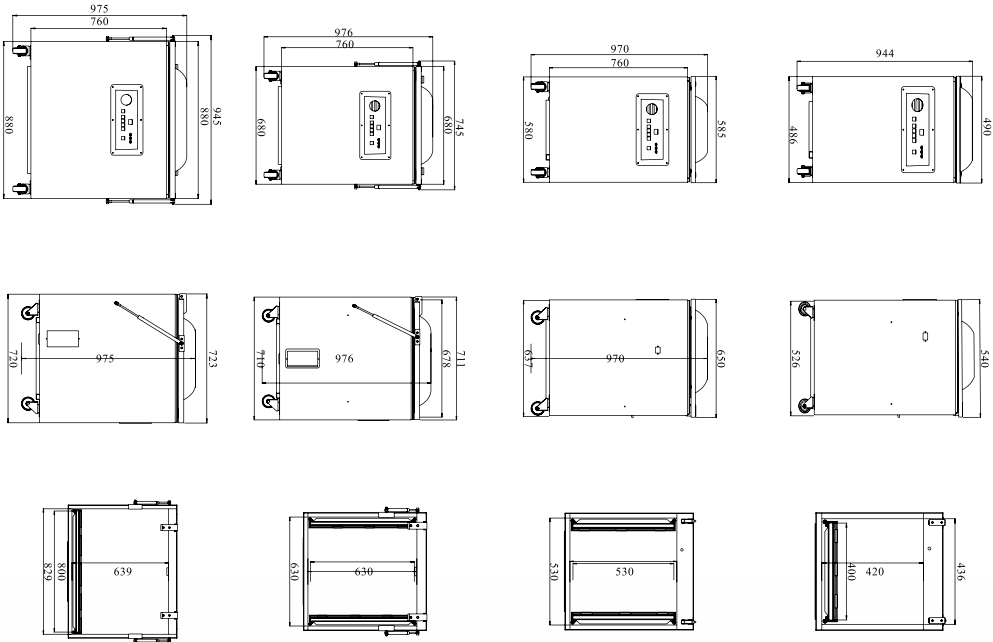




DZQ-400/500/600/800 Vertical Vacuum Packing Machine 立式真空包装机				
型号 Model	DZQ-400	DZQ-500	DZQ-600	DZQ-800
电源 Voltage(V/Hz)	110/220 50-60			
功率 Pump power(kw)	0.9	0.9	1.8	1.8
密封条 Sealing length(mm)	400×10	500×10	600×10	800×10
密封室尺寸 Chamber size(mm)	436×420×75	530×530×75	630×630×95	829×639×100
抽气速率 Pump Capacity(m³/h)	20	20	20×2	20×2
外形尺寸 Dimension(mm)	549×490×453	585×650×980	760×710×1000	970×750×1000
重量 Weight(kg)	70	105	190	280

Accept Customization

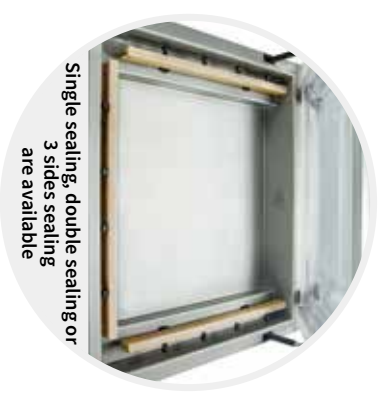

DZQ-800 Vertical Vacuum Packing Machine 立式真空包装机

型号 Model	DZQ-800
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	1.8
密封条 Sealing length(mm)	800×10
密封室尺寸 Chamber size(mm)	830×650×100
抽气速率 Pump Capacity(m³/h)	20×2 / 100
外形尺寸 Dimension(mm)	940×720×980
重量 Weight(kg)	165



东风包装 SINCE 1989




DONGFENG PACKING

Rice vacuum packing machine can vacuum rice package and shape it square and flat.
The lid can close automatically by pressing the start button
The transparent lid allows you to see clearly during packaging.
This machine is an ideal option for grain bean and powder product as well.



DZ-650KH Rice vacuum packing machine 大米真空包装机




型号 Model	DZ-650KH
电源 Voltage(V/Hz)	220/380 50-60
功率 Pump power(kw)	1.8
密封条 Sealing length(mm)	650×10
密封室尺寸 Chamber size(mm)	650×400×100
抽气速率 Pump Capacity(m³/h)	20×2
外形尺寸 Dimension(mm)	860×700×940
重量 Weight(kg)	225





DZL-600 Vertical Chamber Vacuum Packing Machine 立式真空包装机




型号 Model	DZL-600
电源 Voltage(V/Hz)	220/380 50-60
功率 Pump power(kw)	1.8
密封条 Sealing length(mm)	600×10
密封室尺寸 Chamber size(mm)	600×620×220
抽气速率 Pump Capacity(m³/h)	20×2
外形尺寸 Dimension(mm)	765×750×1105
重量 Weight(kg)	210

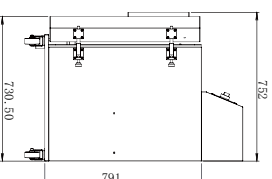



VS-600 External Vacuum Packing Machine 外抽式真空包装机




型号 Model	VS-600
电源 Voltage(V/Hz)	110/220 50-60
功率 Pump power(kw)	0.9
密封条 Sealing length(mm)	600×10
抽气速率 Pump Capacity(m³/h)	20
外形尺寸 Dimension(mm)	640×880×1010
重量 Weight(kg)	80





VS-600L External Vacuum Packing Machine 外抽式真空包装机

型号 Model	VS-600L
电源 Voltage(V/Hz)	220/380 50-60
功率 Pump power(kw)	0.9
密封条 Sealing length(mm)	600×10
抽气速率 Pump Capacity(m ³ /h)	20
外形尺寸 Dimension(mm)	1700×700×700
重量 Weight(kg)	≈ 180



东风包装

SINCE1989

DONGFENG PACKING

DZQ series double chambers vacuum packaging machine is suitable for vacuum sealing all kinds of heat-sealed packages. The products after packing can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh for long storage. It is an ideal vacuum packing machine for big and flexible industry, typically selected by butcher shops, hotels, Restaurants, institutions, grocery stores.

DZQ-400 2SA/500 2SA/600 2SA/700 2SA/850 2SA/1000 2SA

Double chamber Vacuum Packing Machine 双室真空包装机

型号 Model	DZQ-400 2SA
电源 Voltage(V/Hz)	110/220 3Phase 220/380 50-60
功率 Pump power(kw)	0.9 / 1.8 / 3 / 2.2
密封条 Sealing length(mm)	400×10
密封室尺寸 Chamber size(mm)	450×465×180
抽气速率 Pump Capacity(m³/h)	20-100
外形尺寸 Dimension(mm)	1025×609×942
重量 Weight(kg)	≈ 135
型号 Model	DZQ-500 2SA
电源 Voltage(V/Hz)	110/220 3Phase 220/380 50-60
功率 Pump power(kw)	0.9 / 1.8 / 3 / 2.2
密封条 Sealing length(mm)	500×10
密封室尺寸 Chamber size(mm)	565×535×200
抽气速率 Pump Capacity(m³/h)	40-100
外形尺寸 Dimension(mm)	1254×679×968
重量 Weight(kg)	≈ 175
型号 Model	DZQ-600 2SA
电源 Voltage(V/Hz)	110/220 3Phase 220/380 50-60
功率 Pump power(kw)	0.9/1.8 3Phase 3/2.2
密封条 Sealing length(mm)	600×10
密封室尺寸 Chamber size(mm)	667×545×192
抽气速率 Pump Capacity(m³/h)	40-100
外形尺寸 Dimension(mm)	1460×690×960
重量 Weight(kg)	≈ 205
型号 Model	DZQ-700 2SA
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Pump power(kw)	3
密封条 Sealing length(mm)	700×10
密封间距 Sealing distance(mm)	500
抽气速率 Pump Capacity(m³/h)	40-100
外形尺寸 Dimension(mm)	1760×810×1070
重量 Weight(kg)	≈ 325
型号 Model	DZQ-850 2SA
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Pump power(kw)	4
密封条 Sealing length(mm)	850×10
密封间距 Sealing distance(mm)	630
抽气速率 Pump Capacity(m³/h)	200
外形尺寸 Dimension(mm)	2060×940×1070
重量 Weight(kg)	≈ 525
型号 Model	DZQ-1000 2SA
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Pump power(kw)	4
密封条 Sealing length(mm)	1000×10
密封间距 Sealing distance(mm)	750
抽气速率 Pump Capacity(m³/h)	200
外形尺寸 Dimension(mm)	2360×990×1070
重量 Weight(kg)	≈ 625

Technical Characters!





1. Effortless lid swing
2. Fast and easy maintain
3. Water proof electrical box
4. Suitable for food processing plant





东风包装 **SINCE1989**
DONGFENG PACKING



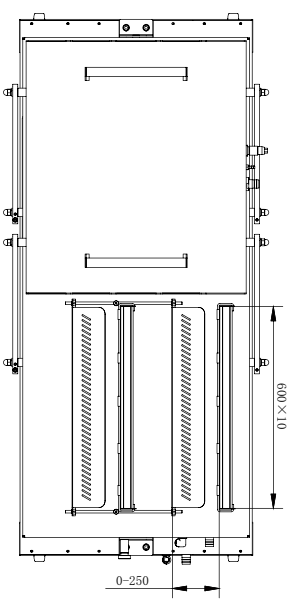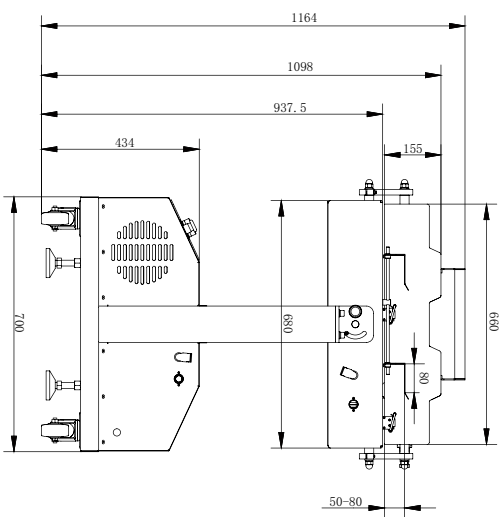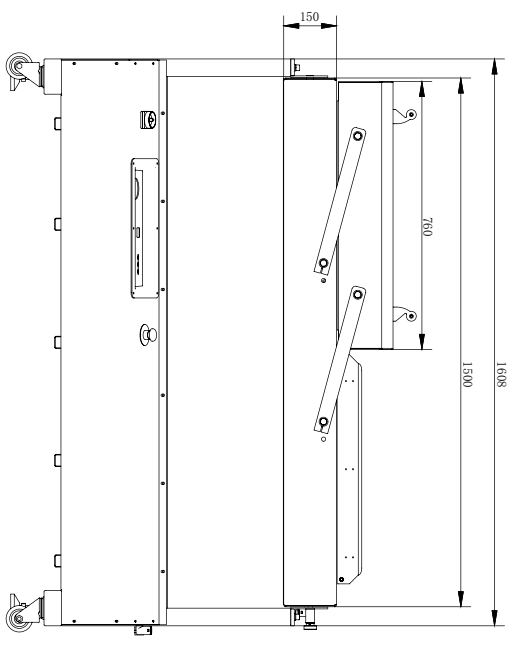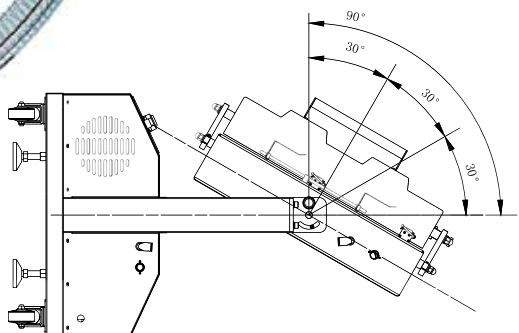

DZQ-600 2SAT Double chamber Vacuum Packing Machine 翻转式双室真空包装机

型号 Model	DZQ-600 2SAT
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Pump power(kw)	1.8
密封条 Sealing length(mm)	600×10
密封室尺寸 Chamber size(mm)	600×250×100
抽气速率 Pump Capacity(m³/h)	40-100
外形尺寸 Dimension(mm)	1620×795×1165
重量 Weight(kg)	200

东风包装 *SINCE 1989*




DONGFENG PACKING

DZQ-850/2SA double chambers vacuum packaging machine is suitable for vacuum sealing all kinds of heat-sealed packages. The products after packing can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh for long storage. It is an ideal vacuum packing machine for big and flexible industry, typically selected by butcher shops, hotels, restaurants, institutions, grocery stores.

Technical Characters!

1. BUSCH pump is optional
2. Pneumatic open/close cover
3. Water proof electrical box
4. PLC control
5. Suitable for food processing plant



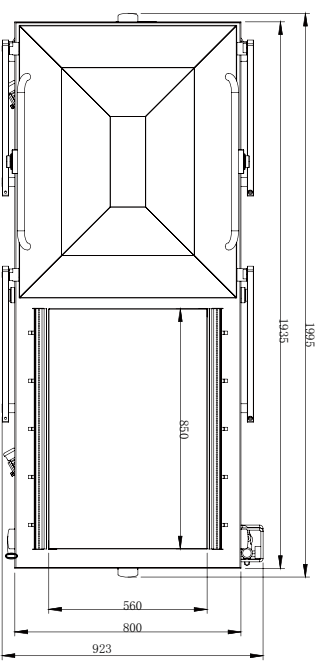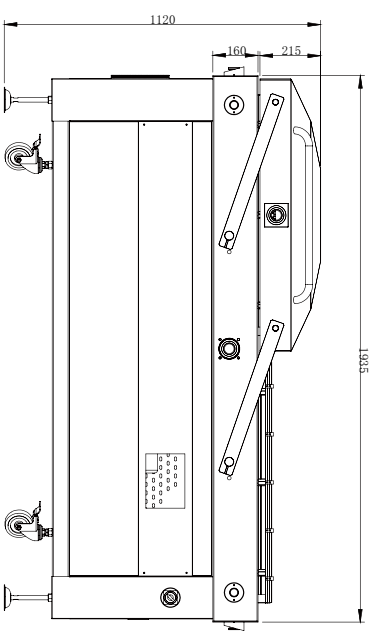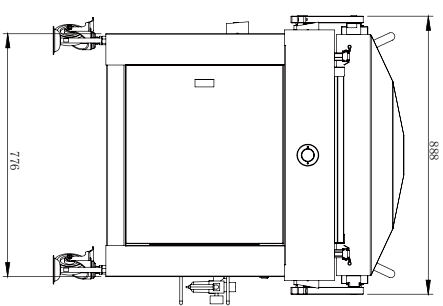

DZQ-850 2SE Double chamber Vacuum Packing Machine 双室真空包装机

型号 Model	DZQ-850 2SE
电源 Voltage(V/Hz)	3Phase 380 50
功率 Pump power(kw)	4kw 10A
密封条 Sealing length(mm)	850×10
真空室尺寸 Chamber Size(mm)	850×575
抽气速率 Pump Capacity(m ³ /h)	200
气源 Air source(Mpa)	0.6
密封频次 Work efficiency(times/min)	5-8
外形尺寸 Overall Dimension(mm)	1995×923×1120
重量 Weight(kg)	≈ 550

东风包装 SINCE 1989

DONGFENG PACKING

DZQ-850S vacuum packing machine is the ideal solution for the automated packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.


Technical Characters!

- 1.High speed production
- 2.Hygienic design for easy cleaning
- 3.Reliable use with a wide range of pouch materials
- 4.Individual selection of vacuum pumps and equipment
- 5.High level of flexibility and pack quality



DZQ-850S Chamber Belt Vacuum Packing Machine 传输式真空包装机

型号 Model	DZQ-850S
电源 Voltage(V/Hz)	3Phase 380 50
功率 Power(kw/A)	4kw 10A
密封条 Sealing size(mm)	850mm M type 2 seal
密封间距 Sealing distance(mm)	500
尺寸 dimensions(mm)	1020×883×1205
抽气速率 Pump Capacity(m³/h)	200
最大包装尺寸 Package size Max(mm)	850×500×250
密封频次 Work efficiency(times/min)	3-5
气源 Air source	0.6MPa
重量 Weight(kg)	≈ 420kg

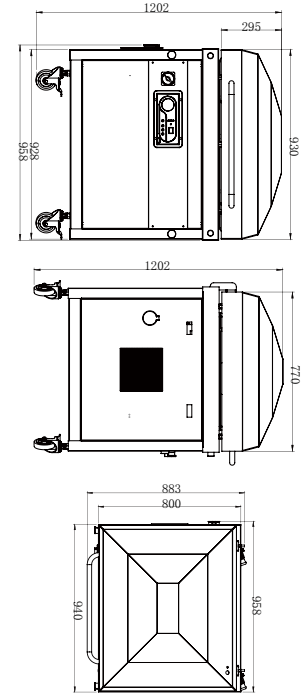

DZQ-800C is the ideal solution for the automatic packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.




Technical Characters!

1. High speed production
2. Digital electronic control that can be operated intuitively
3. Hygienic design for easy cleaning
4. Reliable use with a wide range of pouch materials
5. Individual selection of vacuum pumps and equipment
6. High level of flexibility and pack quality



DZQ-800C Chamber Belt Vacuum Packing Machine 传输式真空包装机

型号 Model	DZQ-800C
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Pump power(kw)	4
密封条 Sealing length(mm)	Max.800×10
包装尺寸 TRAV SIZE(mm)	Max.750×220×630
抽气速率 Pump Capacity(m ³ /h)	100
密封频次 Work efficiency(times/min)	1-4
模式 Sealing option	单 / 双封口 / 封口 + 封切 Single/Double Seal / Seal And Cut
外形尺寸 Dimension(mm)	2340×1240×1500
重量 Weight(kg)	≈ 600kg

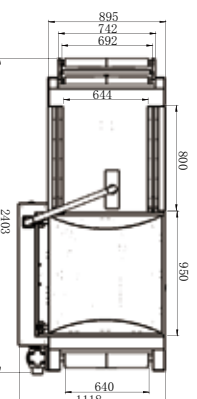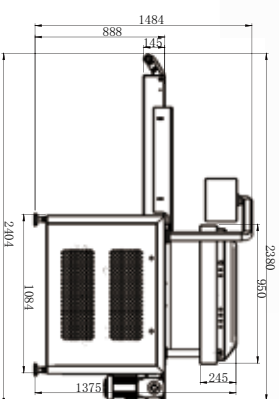

东风包装

SINCE1989

DONGFENG PACKING

ST series Dip/shrink tank is a versatile shrinking unit which is an ideal extension for chamber machines, not only with regard to operability and design. It's constructed of a high-quality stainless steel. The movement of the product support and the heating could be done electrically. The heavy duty casters (with brake) on the machine suitable for mobile use.


Technical Characters!

1. Stainless Steel Construction.
2. Efficient Electric Heating.
3. Programmable Temperature Control.
4. Simple Push Button Cycle Operation.
5. Easy Access for Cleaning and Maintenance.



ST-6050 Hot Water Dip Tanks 热水收缩机


型号 Model	ST-6050		
电源 Voltage(V)	220V 3Phase 220/380 50-60	水箱 Water tank (m³)	0.14
功率 Power(kw)	4.5×2	水箱尺寸 Tank dimension (mm)	500×600×498
温度 Temperature(°C)	0-99°C Adjustable	材质 Material	SUS304
模式 Control	Auto/Manual	最大装载 Maxload(kg)	100
自动 Automatic	0-99 Seconds adjustable up and down time,start with autocrmatic cycle		
手动 Manual	Jog up and down function		
升降 Travel	330		
低液位保护 Low level protection	Stop heating when the level is low,and the light will shine		

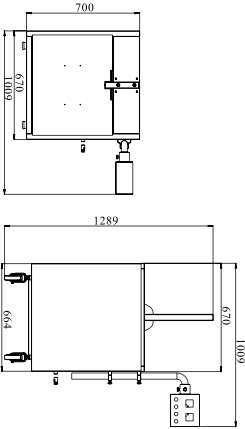



ST-1552 Hot Water Shrink Tunnels 水幕式热水收缩机

型号 Model	ST-1552
电源 Voltage(V/Hz)	3Phase 220/380 50
功率 Power(kw)	40kw(Heating Tube 3x12kw, Water Pump 4kw) 60A
装载 Load(kg)	Max.30
速度 Speed(m/min)	0-15
水箱 Water tank (L)	Max.550
炉道尺寸 Furnace Size(mm)	1500×600×260
外形尺寸 Dimension(mm)	2025×900×1775
重量 Weight(kg)	≈ 460

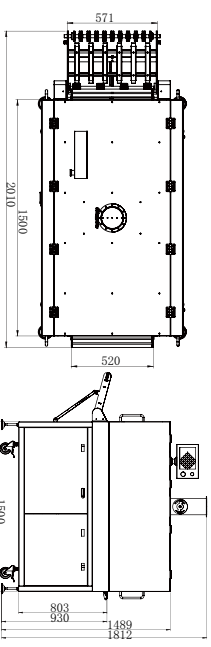


东风包装 *SINCE 1989*

DONGFENG PACKING

DZQ-800C + ST-8031 machines are the ideal solution for the automated packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infeed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.

Technical Characters!

1. High speed production
2. Digital electronic control that can be operated intuitively
3. Hygienic design for easy cleaning
4. Reliable use with a wide range of pouch materials
5. Individual selection of vacuum pumps and equipment
6. High level of flexibility and pack quality

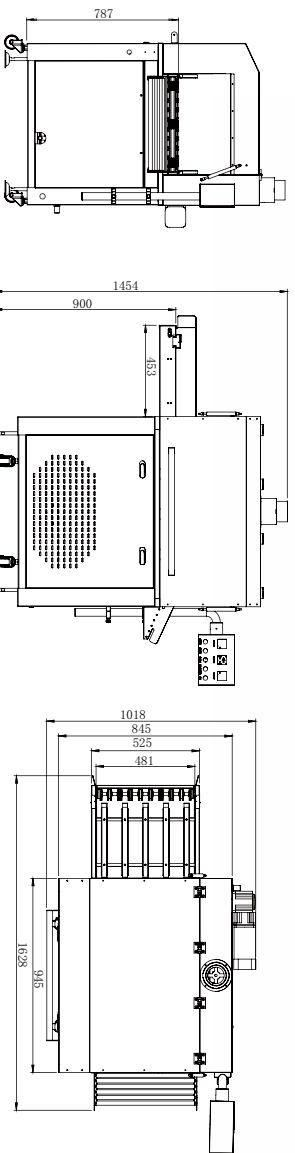



DZQ-800C + ST-8031 Chamber Belt Vacuum Packing Machine with Shrink tanks
传输式真空包装机 + 隧道式热水收缩机

型号 Model		ST-8031	型号 Model	DZQ-800C
电源 Voltage(V/Hz)		3Phase 220/380 50-60	电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Power(kw)		18.5	功率 Pump power(kw)	4
水箱尺寸 Water tank size(mm)		830×580×500 Max.220L	密封条 Sealing length(mm)	Max.800×10
密封频次 Work efficiency(times/min)		1-6	包装尺寸 TRAY SIZE(mm)	Max.750×220×630
外形尺寸 Dimension(mm)		1345×1010×1245	抽气速率 Pump Capacity(m ³ /h)	100
重量 Weight(kg)		≈ 200kg	密封频次 Work efficiency(times/min)	1-4
			模式 Sealing option	单 / 双 封口 / 封口 + 封切
			外形尺寸 Dimension(mm)	Single/Double Seal / Seal And Cut
			重量 Weight(kg)	2340×1240×1500
				≈ 600kg

东风包装 SINCE1989

DONGFENG PACKING



SY-01 Manual Tray Sealer 封盒机

型号 Model	SY-01
电源 Voltage(V/Hz)	1Phase 110/220 50-60
功率 Pump power(kw)	0.5
包装尺寸 Tray Size(mm)	200×140×50
外形尺寸 Dimension(mm)	565×238×265
重量 Weight(kg)	20



ZT-260 Skin Vacuum Tray Sealer 手压贴体机



型号 Model	ZT-260
电源 Voltage(V/Hz)	1Phase 110/220 50-60
功率 Power(kw)	1.5
抽气速率 Pump Capacity(m³/h)	4
包装尺寸 Tary Size(mm)	250×170×20
外形尺寸 Dimension(mm)	515×404×389
重量 Weight(kg)	25

ZT-480 is a semi-automatic equipment focusing on vacuum skin packaging of raw fresh meat, fruit and frozen product.

Vacuum skin packaging is also known as 3D packaging - a whole new form of retail packaging.

During the packing process, the pack film lies onto products' surface like a piece of skin membrane.



Not only does this technique display the most original appearance of the product, it also preserves the quality, color and freshness to the highest standard.

Technical Characters!

1. 2 stations work in turns
2. High speed production
3. PLC control High-end appearance






型号 Model	ZT-480
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Power(kw)	9
抽气速率 Pump Capacity(m³/h)	100
密封频次 Work efficiency(times/min)	1-4
包装形式 Result	封口 / 充气封口 / 贴体 Seal/Gas insert/Skin Vacuum
包装尺寸 Tary Size(mm)	260×175×25
外形尺寸 Dimension(mm)	1290×1280×1450
净重 Net Weight(kg)	≈ 300



东风包装 SINCE1989

DONGFENG PACKING

MAP is the latest healthy Foods and Ready Meals innovation. They are widely to be used to pack ready meal, fruit, salmon fish, seafood, meat, beef steak, cheese, fruit, vegetables etc. Boosts consumer appeal by preserving food quality and keeping food stationary in the tray. Removing the oxygen preserves the food to extend the shelf life of the product. Vacuum-sealed technology ensures that the food taste and ingredients are captured at their freshest.

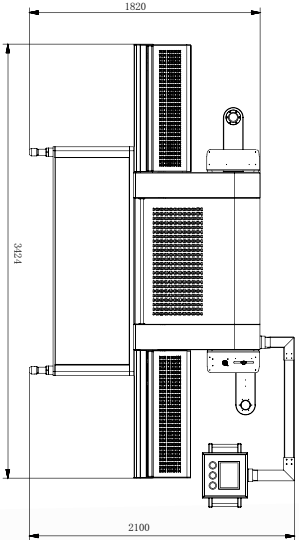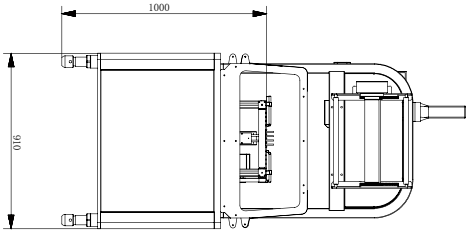

QT-700S Map Tray Sealer 气调封盒机

型号 Model	QT-700S
电源 Voltage(V/Hz)	3Phase 220/380 50-60
功率 Power(kw)	5
包装形式 Result	封口 / 真空封口 / 充气封口 Seal/Vacuum Seal/Gas Insert
包装频次 Capacity(times/min)	1-6
包装尺寸 Tray Size(mm)	200×140×50
抽气速率 Pump Capacity(m³/h)	100
外形尺寸 Dimension(mm)	3520×920×1915
重量 Weight(kg)	≈ 750

CE ISO9001: 2008



 中国太平洋保险
China Pacific Insurance



东风包装 **SINCE 1989**

DONGFENG PACKING

Main structure is made of 304 stainless steel
PLC,touch screen and servo motor are from German Siemens
High-precision photoelectric sensing system is from Japan Omron
Vacuum pump is from original German Busch
Adopt combined molds,easy to change,and mold has cooling system
Coding machine is optional
Insert gas after vacuum is optional
Waste material collecting system
Open type chain is from germany,suitable for both soft and hard film thermoforming





DF-350/420 Thermoforming Vacuum Packer 拉伸膜包装机

型号 Model	DF-350	DF-420
电源 Voltage(V/Hz)	220/380 50-60	
功率 Pump power(kw)	200	
真空度 Vacuum degree(Pa)	≤ 200	
压缩空气 Compress air(Mpa)	≥ 0.6	
冷却水 Cooling water(Mpa)	≥ 0.15	
上膜宽度 Upper film width(mm)	324	394
下膜宽度 Down film width(mm)	355	425
外形尺寸 Dimension(mm)	4500×900×1800	6500×1200×1900
重量 Weight(kg)	1800	2500



VT-25 Vacuum Tumblers 真空腌制机

型号 Model	VT-25
电源 Voltage(V/Hz)	220 50-60
功率 Power(kw)	0.15
腌制罐尺寸 Tumbler of size(mm)	φ400x 400mm
腌制罐材质 Tumbler of material	SUS 304
腌制罐转速 Tumbler of speed(r/min)	30
载重 Capacity(kg)	25
真空度 Vacuum pump of Capacity(pa)	200
外形尺寸 Dimension(mm)	805 × 591 × 550
重量 Weight(kg)	30



ST-5030 Hot Water Dipping Machine 手动热水收缩机


型号 Model	ST-5030
电源 Voltage(V/Hz)	220 50-60
功率 Power(kw)	≈ 3
外形尺寸 Dimension(mm)	587 × 331 × 272
重量 Weight(kg)	30



DF-130J Filling Sesling Machine 酱包机

型号 Model	DF-130J
电源 Voltage(V/Hz)	110/220 50-60
功率 Power(kw)	0.9
薄膜最大直径 Film max diameter(mm)	200
最大宽度 Max width(mm)	65
外形尺寸 Dimension(mm)	570×360×710
重量 Weight(kg)	35

东风包装 **SINCE1989**
DONGFENG PACKING

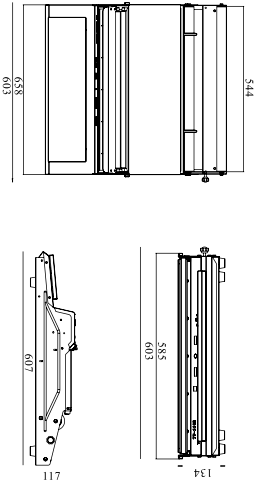

HW-450/550 Hand Wrapper 保鲜膜机

型号 Model	HW-450	HW-550
电源 Voltage(V/Hz)	110/220 50-60	
功率 Pump power(kw)	0.3	0.4
密封条 Sealing length(mm)	450	550
外形尺寸 Dimension(mm)	640×520×18	640×620×18
重量 Weight(kg)	7.5	8.5

TD-E twist tie machine is an ideal and economical machine for bread shop ,gift store to pack plastic bags.
It saves much labour and time for your production.
Current model is the second generation,e use aluminium and steel parts to replace plastic ones,the machine is more stable and durable.
Colorful tie is option,each roll is 1000 meters long.



TD-E pro Tie Machine 金丝扎线机

型号 Model	TD-E pro
电源 Voltage(V/Hz)	1Phase 110/220 50-60
功率 Power(kw)	0.6
包装直径 Packing Diameter	≤ Φ13
可调节金丝长度 Tie Length(mm)	50-100
外形尺寸 Dimension(mm)	530×180×290
重量 Weight(kg)	14

The Super900 table top cling film wrapper can pack a variety of different products such as fruit vegetable meat egg mushroom sea food and ready meals.

With an average of 12 packs per minute, the packaging efficiency is about three times than manual.It can help you increase productivity and reduce consumables

Different fruits and vegetables require different packaging methods with tray or without tray



Super 900X Wrapping Machine 自动保鲜膜机

型号 Model		Super 900X	
电源 Voltage(V/Hz)		110/220 50-60	
功率 Power(kw)	0.46	薄膜宽度 Width of film(mm)	25-450
密封频次 Capacity	12pcs/min	卷膜直径 Diameter of film roll(mm)	<160mm
包装长度 Package length(mm)	80-350	外形尺寸 Dimension(mm)	668×696×696
包装宽度 Package width(mm)	80-270	重量 Weight(kg)	62.5
包装高度 Package height(mm)	10-150		

东风包装

SINCE1989

DONGFENG PACKING

Hand sealer is suitable for sealing films in PE PVC and PP materials.
We have hand sealer with different body material like aluminium, iron and plastic, PFS C type machine has a side cutter it can cut down the film after sealing.

Technical Characters!

- 1.Blue and gray are regular color
- 2.Only use copper material transforer
- 3.OEM logo is available
- 4.Fuse and special plug are optional



PFS-100~500 Hand sealer 手压封口机

型号 Model	PFS-100	PFS-200	PFS-300	PFS-400	PFS-500
电源 Voltage(V/Hz)			110/220 50-60		
功率 Power(kw)	0.15	0.31	0.38	0.6	0.75
密封条 Sealing size(mm)	100×2	200×2	300×2	400×2	500×2
外形尺寸 Dimension(mm)	72×233×136	75×319×144	84×442×155	84×547×160	85×640×165
重量 Weight(kg)	1.5	2.2	3.5	4.2	5.6

36 DONGFENG PACKING MACHINE



FRN-500~1000 Hand Sealer 加长型手压封口机

型号 Model	FRN-500	FRN-600	FRN-700	FRN-800	FRN-900	FRN-1000
电源 Voltage(V/Hz)			110/220 50-60			
功率 Power(kw)	0.7	0.78	0.91	1.05	1.2	1.4
密封条 Sealing size(mm)	500×2	600×2	700×2	800×2	900×2	1000×2
外形尺寸 Dimension(mm)	705×150×250	805×150×250	905×150×250	1005×150×250	1105×150×250	1205×150×250
重量 Weight(kg)	5.5	6.0	6.5	7.0	7.5	8.0




PS-450/600 Auto Sealer 半自动脚踏封口机

型号 Model	PS-450	PS-600
电源 Voltage(V/Hz)		110/220 50-60
功率 Impulse power(kw)	0.6	0.8
密封条 Sealing size(mm)	450×10	600×10
尺寸 Dimension(mm)	650×480×300	750×480×300
重量 Weight(kg)	25	30

东风包装 SINCE1989

DONGFENG PACKING

Portable sealer is suitable for sealing films in PE, PVC and PP materials.
FKR sealer is a direct heat portable sealer,FKR A type is a impulse heat portable sealer

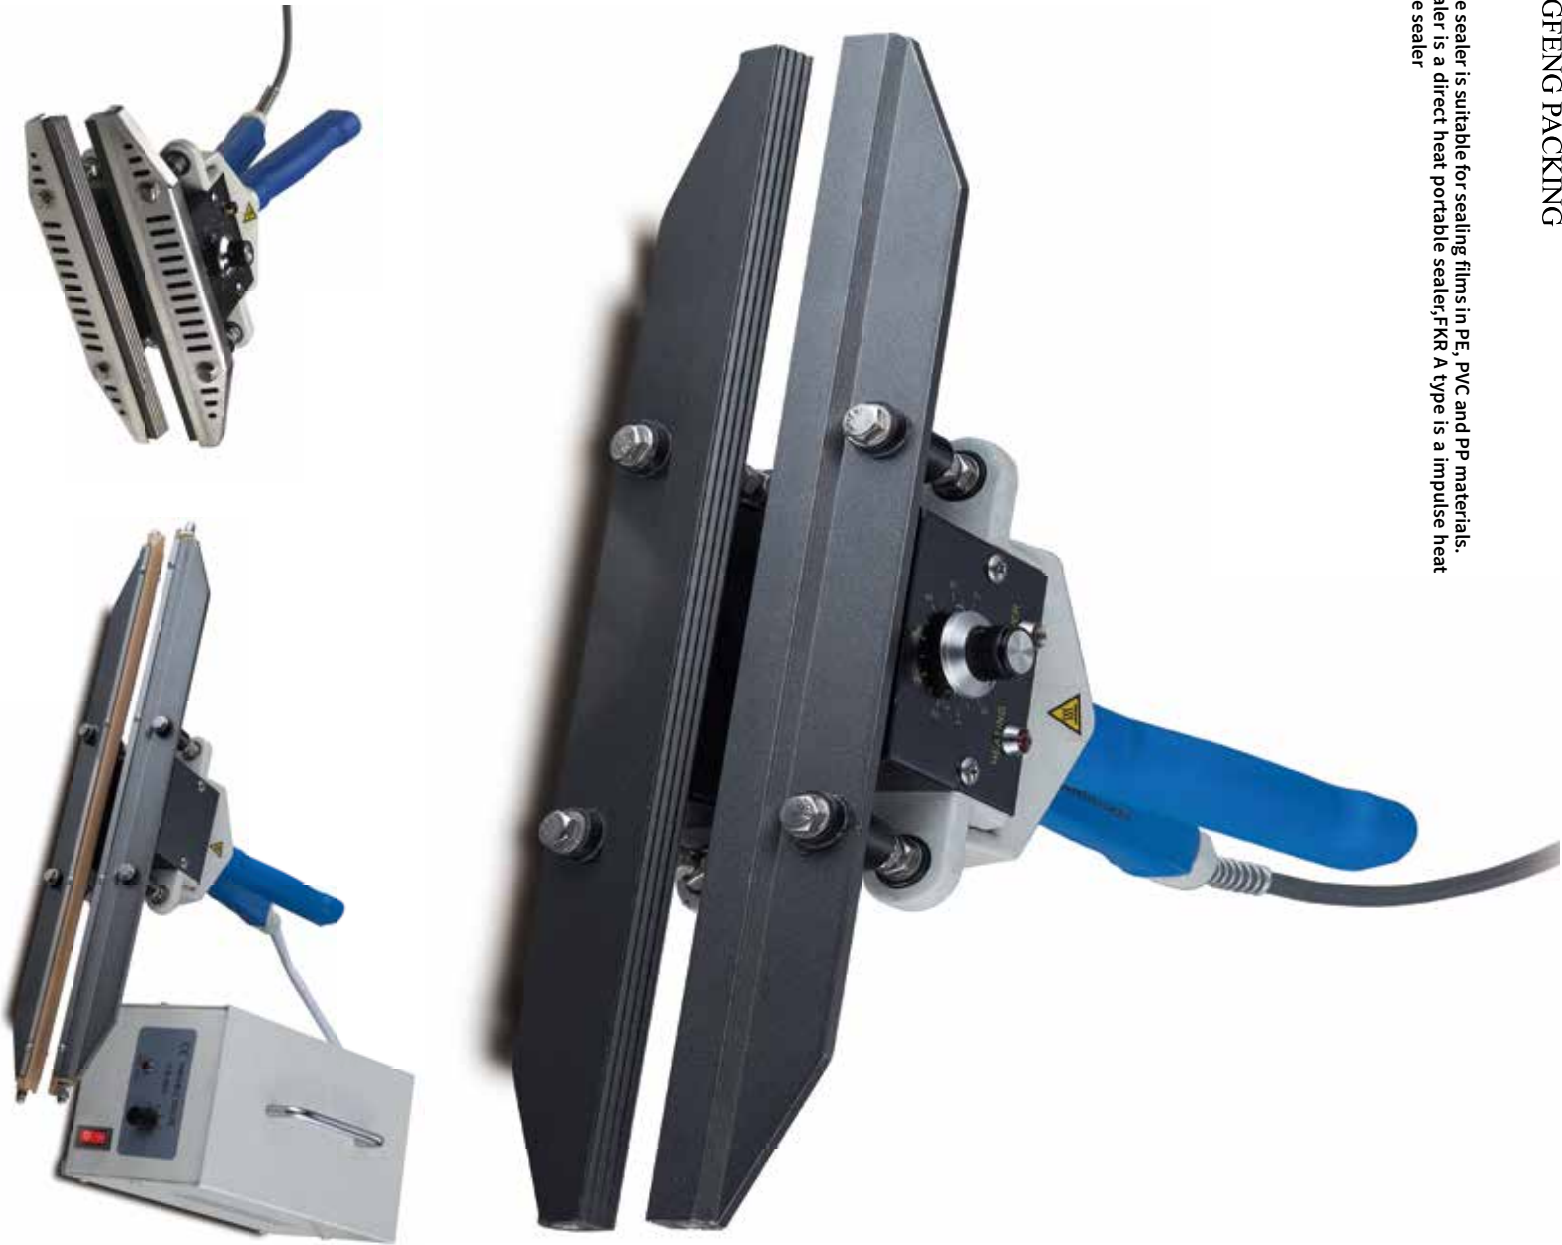

FKR-200/300/400 Portable Sealer 手钳封口机

型号 Model	FKR-200	FKR-300	FKR-400	FKR-200A	FKR-300A	FKR-400A
电源 Voltage(V/Hz)	110/220 50-60					
功率 Power(kw)	0.3	0.4	0.5	0.45	0.65	0.75
最大密封条 Max Sealing size(mm)	200×12	300×12	400×12	200×5	300×5	400×5
温度 Temperature(℃)	0-250	0-250	0-250	0-250	0-250	0-250
产品尺寸 Dimension(mm)	200×145×245	300×145×245	400×145×245	200×145×245	300×145×245	400×145×245

Step sealer is suitable for sealing films in PE, PVC and PP materials.
PFS sealer is a foot operated impulse heat sealer,PFS-DD sealer is a foot operated direct heat sealer.



PFS-350/450/600 Step Sealer 瞬热式脚踏封口机

型号 Model	PFS-350	PFS-450	PFS-600
电源 Voltage(V/Hz)	110/220 50-60		
功率 Impulse power(kw)	0.85	1.05	1.5
密封条 Sealing size(mm)	350×10	450×10	600×10
密封厚度 Max.Sealing Thickness(mm)	0.05-0.9	0.05-0.9	0.05-0.9
包装尺寸 Dimension(mm)	800×540×250	800×540×250	800×540×250
重量 Weight(kg)	21	23	25



Technical Characters!

1. Blue is regular color
2. Only use copper material transformer
3. Regular sealing width is 10mm. 2mm/5mm/8mm is available

PFS-DD200/300/400 Step Sealer 直热式脚踏封口机

型号 Model	PFS-DD200	PFS-DD300	PFS-DD400
电源 Voltage(V/Hz)	110/220 50-60		
功率 Impulse power(kw)	0.25	0.35	0.5
密封条 Sealing size(mm)	200×15	300×15	400×15
密封厚度 Max.Sealing Thickness(mm)	0.1-1.2	0.1-1.2	0.1-1.2
包装尺寸 Dimension(mm)	800×540×260	800×540×260	800×540×260
重量 Weight(kg)	26	28	30



DBF-770W Band Sealer 连续封口机

型号 Model	DBF-770W
电源 Voltage(V/Hz)	110/220 50-60
功率 Power consumption(kw)	0.75
密封速度 Sealing speed(m/min)	0-12
密封宽度 Sealing width(mm)	6-15
温度范围 Temperature range(°C)	0-300
最大载重 Conveyor loading(kg)	5
外形尺寸 Dimension(mm)	860×400×440
重量 Weight(kg)	25




DBF-770WL Band Sealer 卧立两用连续封口机

型号 Model	DBF-770WL
电源 Voltage(V/Hz)	110/220 50-60
功率 Power consumption(kw)	0.5
密封速度 Sealing speed(m/min)	0-12
密封宽度 Sealing width(mm)	6-15
温度范围 Temperature range(°C)	0-300
最大载重 Conveyor loading(kg)	5
外形尺寸 Dimension(mm)	875×410×395
重量 Weight(kg)	30

The machine is an ideal option for sealing small packages. It uses constant temperature control system, reliable quality motor and gear box. it can seal plastic films made from various materials continuously. Embossing wheel and counting device are optional.

Technical Characters!

1. DBF-770 series are available in three models: horizontal model DBF-770W, vertical model DBF-770WL and console model DBF-770LD
2. Main structure material is made of MS or SS
3. Conveyor table could emboss your company logo or name

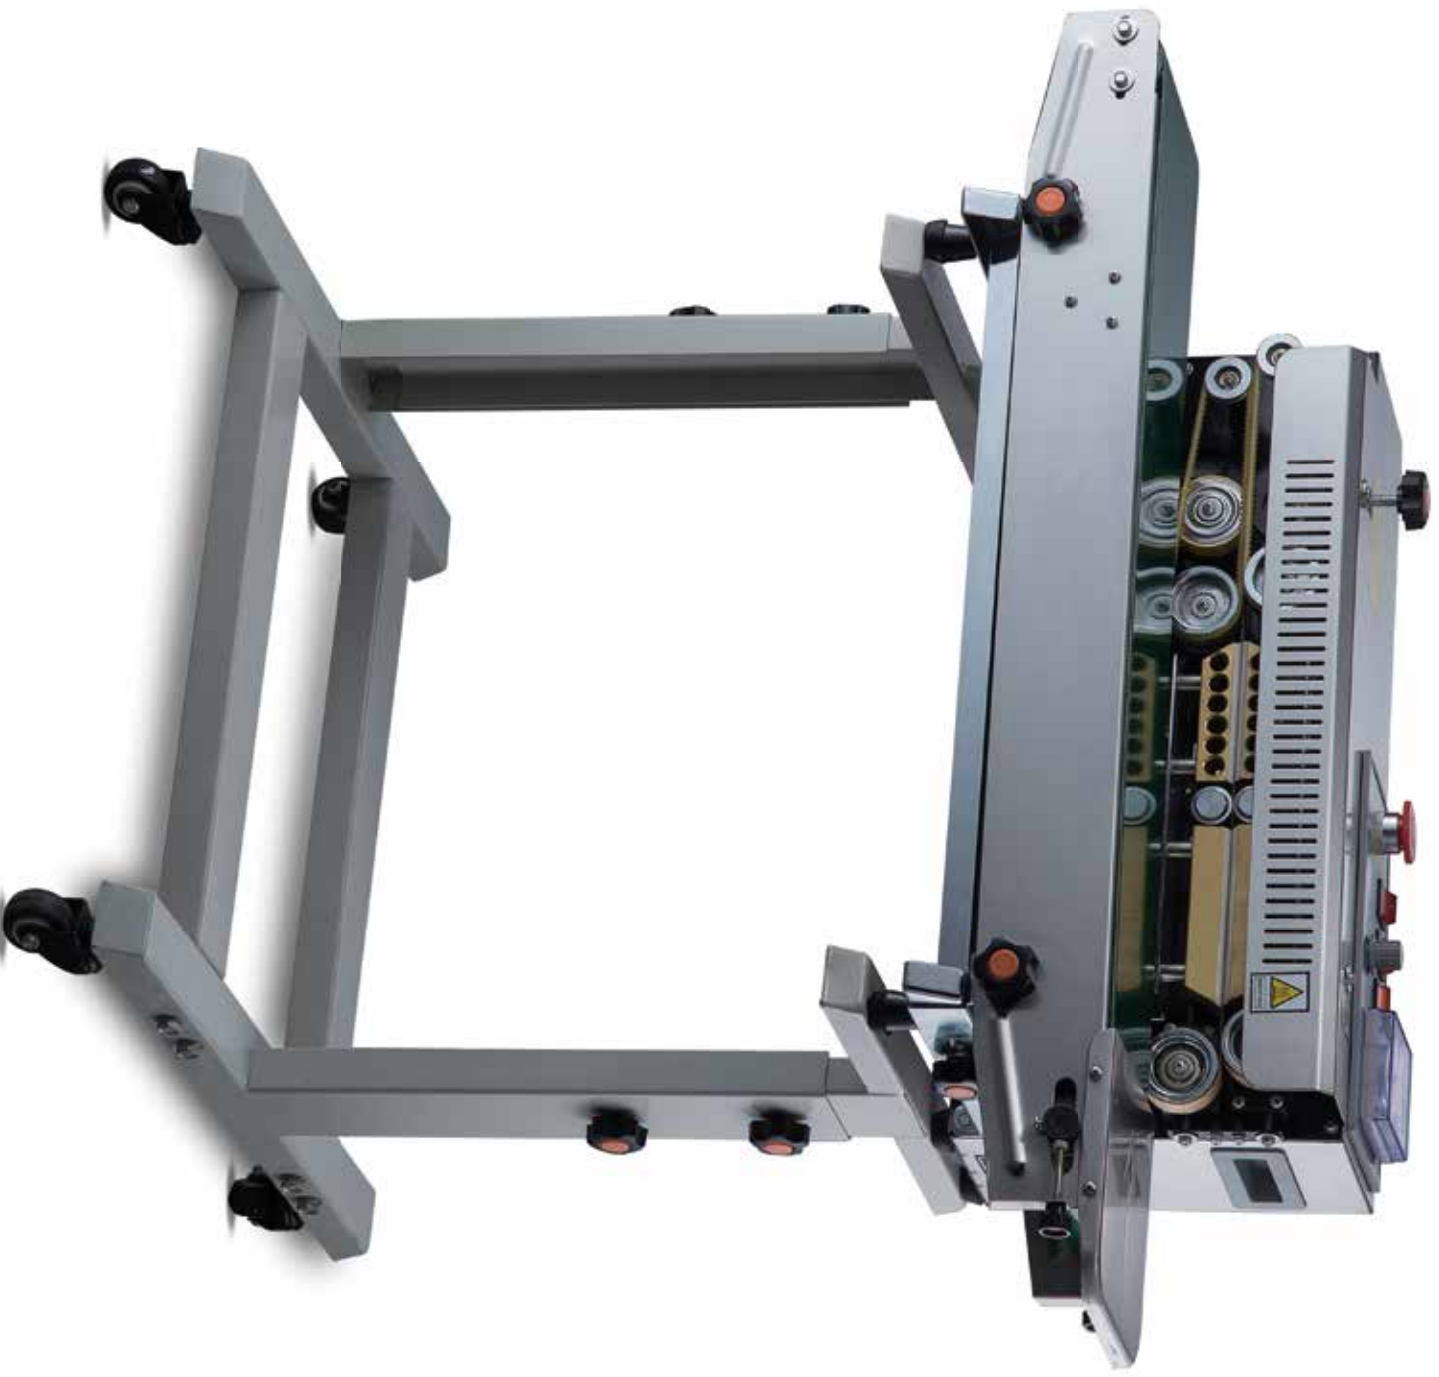

东风包装 SINCE1989

DONGFENG PACKING

FM series of 2 in 1 shrink sealer has advantage of fast heating,compact size and shrinking sealing 2 in 1. it is very suitable for PVC POF film shrink and sealing,widely used in food,printing,supermarket and stationary industry.



FM-3028/4535/5540/5540A Shrink Machine 二合一收缩机

型号 Model	FM-3028	FM-4535	FM-5540	FM-5540A
电源 Voltage(V/Hz)	110/220 50-60			
功率 Power(kw)	3	4	3.5	3.5
最大包装尺寸 Max packing size(mm)	340×250×100	430×250×200	550×400×200	550×400×200
收缩时间 Shink time(P/min)	1-4	1-4	1-4	1-8
包装尺寸 Dimension (mm)	955×600×1020	1245×550×1050	1365×690×1100	1530×690×1100
重量 Weight(kg)	100	120	130	140

BS series shrink tunnel adopt infrared ray to heat and shrink PVC materials, it's very suitable for industry of food, drinks, cosmetic, toy, stationary, book, hardware and so on.
We have many different sizes of machine for client to choose and we also receive OEM order, we can design the machine according to your request.



BS-200/250/300LD/400LD/450/550/650 Shrink Machine 热收缩机

型号 Model	BS-200	BS-250	BS-300LD	BS-400LD	BS-450	BS-550	BS-650
电源 Voltage(V/Hz)			110/220 50-60			3Phase 220/380 50-60	
功率 Power(kw)	2.5	3	4.5	6.5	7.5	15	20
最大包装尺寸 Max packing size(mm)	200×120	250×150	300×150	400×200	450×250	550×350	650×500
收缩时间 Shrink time(P/min)	0.6	0.6	0-10	0-10	0-10	0-10	0-10
包装尺寸 Dimension(mm)	800×450×545	820×520×650	1100×530×1250	1200×630×1300	1320×650×1340	1920×900×1420	1930×950×1580
重量 Weight(kg)	30	40	75	85	100	160	220



BS-4525A/4535A Shrink Machine 热收缩机

型号 Model	BS-4525A	BS-4535A
电源 Voltage(V/Hz)		110/220/ 3Phase 220/380 50-60
功率 Power(kw)	6.5	6.5
最大包装尺寸 Max packing size(mm)	450×250	450×350
速度 Speed(m/min)	0-10	0-10
包装尺寸 Dimension(mm)	1200×682×965	1200×682×1065
重量 Weight(kg)	95	105

东风包装 SINCE1989

DONGFENG PACKING

Hp-130 is a manual type ribbon coding machine,very simple and easy to operate.

Hp-241 is a automatic type ribbon coding machine.

These 2 models are very economical, very suitable for small factories or stores to use. Ribbon has different color to choose and easy to replace. Pls note the coding part need at least 15mins to pre-heat,otherwise the temperature is too low so the ribbon can not be print on the products.

HP-130 Ribbon Coding Machine 打码机

型号 Model	HP-130
电源 Voltage(V/Hz)	110/220 50-60
功率 Power(kw)	0.04
打印速度 Printing speed(pcs/min)	0-100
印刷数量 Printing Quantity	1 行 One line 2 行 Two lines 3 行 Three lines
色带宽度 Color Ribbon Width(mm)	Max.12Types Max.24Types Max.36Types
外形尺寸 Dimension(mm)	25 30 35 270×160×220
重量 Weight(kg)	2



HP-241 Ribbon Coding Machine 打码机

型号 Model	HP-241
电源 Voltage(V/Hz)	110/220 50-60
功率 Power(kw)	0.22
打印速度 Printing speed(pcs/min)	0-100
印刷数量 Printing Quantity	1 行 One line 2 行 Two lines 3 行 Three lines
色带宽度 Color Ribbon Width(mm)	Max.12Types Max.24Types Max.36Types
外形尺寸 Dimension(mm)	25 30 35 350×350×350
重量 Weight(kg)	10



MY-380 adopt photoelectric mechanism technology, featuring automatic temperature control, auto counting and adjustable print position. Adopt solid-ink coding with selectable color, featuring legible printing, instant printing-instant drying and strong adhesion.



型号 Model	MY-380
电源 Voltage(V/Hz)	110/220 50-60
功率 Power(kw)	0.18
墨辊尺寸 Ink roller size(mm)	35×32
打印速度 Printing speed (pcs/min)	300
对象大小 Object size(mm)	L:55-500 W:30-300
字母数字 Letters number(mm)	5lines 10letters per line max
机器重量 Machine Weight(kg)	23
机器尺寸 Machine size(mm)	440×340×260

HP-450 Ribbon Coding Machine 打码机



型号 Model	HP-450
电源 Voltage(V/Hz)	110/220 50-60
功率 Power(kw)	0.22
最大打印速度 Max.Printing speed(pcs/min)	200
最大打印行 Max.Printing line 色带或墨辊的尺寸 Size of Character(height)	10.5PT:3lines(Max.12Types/Line) 3.0
Size of Color Ribbon or Solid-ink	25 30 35
Roller(mm)	
最大水平调整打印尺寸 Max.Horizontal adjusting Size for Printer	150
重量 Weight for Printer(Without Stand)	7
模宽范围 Max.Fillm Width(mm)	200-800

SINCE1989,26800 m² modern factory
Best-selling in more than 100 countries and regions around the world

国家高新技术企业
National high-tech
enterprise

"专精特新"企业
Packaging specialized
enterprises

重点出口企业
Focus export
enterprises

浙江东风包装机械有限公司 浙江迈克姆进出口有限公司

ZHEJIANG DONGFENG PACKING MACHINE CO.,LTD.
ZHEJIANG MECHANISM IMPORT and EXPORT
CO.,LTD.

地址: 浙江省温州市鹿城区轻工产业园周岭路 22 号
外贸部: 0577-89786750 89786760 88775569 88786310
内贸部: 0577-88781900
传真: 0577-88781901
网址: www.packingmachine.com
Add: Plot A2-13,Lucheng Light Industry Zone,Wenzhou,Zhejiang,China
Tel: 0086-577-56969075 88775569 88786310
Fax: 0086-577-88781901
Web: www.packingmachine.com



• 本资料经仔细核对，为求准确。浙江东风包装机械有限公司保留更改产品与规格的权利，如有变更，恕不另行通知。浙江东风包装机械有限公司拥有画册产品外观专利，未经许可使用，保留追究法律责任。

• This information has been carefully checked to be accurate.Zhejiang dongfeng packing machine co.,ltd.reserves the right to change product designs and sepecifications are subject to change without notice.Zhejiang dongfeng packing machine co.,ltd.has the appearance of the product of the album patents,unauthorized use of the reserve liability.